


# ZONO™ SC 2 DD WH & D - Double Door Double Deep Machine with Heat and Dry

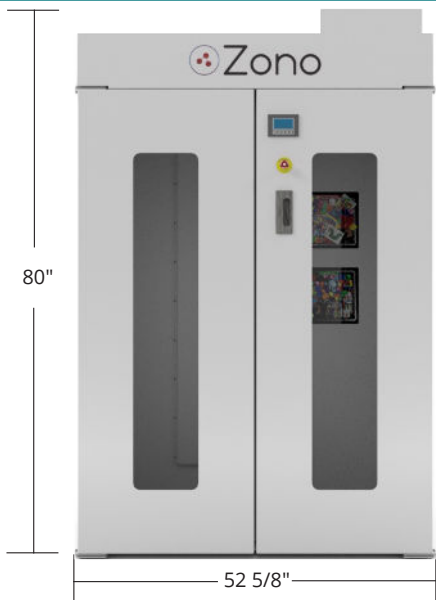

## KILLS 99.9% OF COMMON VIRUSES\* & BACTERIA\* IN 38 MINUTES

- EFFECTIVE** The ZONO™ Cabinet disinfects and sanitizes many different surfaces, including plastics, electronics, metal, and varnished wood; and sanitizes fabrics and other porous surfaces without using liquid chemicals.
- SIMPLE** The ZONO™ Cabinet is simple to set up and easy to operate. Place items onto the Integrated Mobile Carts and roll them directly into the ZONO™ Cabinet. No user assistance is needed during operation, and in 38 minutes, items are ready to use immediately, with no rinsing, wiping, or worry.
- SAFETY FEATURES** Numerous safety features exist to provide protection during operation.
- Emergency stop buttons inside and outside
  - Clear safety glass panel doors
  - Password protected digital display panel
  - Ozone sensors
  - Magnetic door lock
  - Ozone rated door gaskets
- SUSTAINABLE**
- The ZONO™ Cabinet uses only three cents of electricity per cycle.
  - Uses less than two ounces of water per cycle.

## VIRUSES & BACTERIA TESTED & CERTIFIED

- ✓ Norovirus
- ✓ Influenza-A
- ✓ Respiratory Syncytial Virus (RSV)
- ✓ Staphylococcus aureus (Staph)
- ✓ Methicillin-Resistant Staphylococcus aureus (MRSA)
- ✓ Escherichia coli (E. coli)
- ✓ Streptococcus pyogenes (S. pyogenes)
- ✓ Shigella dysenteriae (Shigella)
- ✓ Salmonella enteritidis (Salmonella)
- ✓ Pseudomonas aeruginosa (P. aeruginosa)

## SPECIFICATIONS

- Ozone and humidity are generated in the air tight cabinet to disinfect and sanitize.
- Dry cycle dries apparel and gear without damage.
- Heat cycle kills bedbugs, lice, and their eggs (125°F).
- Exterior meets ASTM C1055 standards. Safe to touch during operation.
- Dimensions: 80" H x 52 5/8" W x 62" D.
- Capacity: 103 cu ft.
- Weight: 537 lbs.
- No downtime between cycles.
- Connects to 240V 2 Phase NEMA 14-30R receptacle (see illustration).
- Power Consumption: 800 Watts during Sanitizing Cycle; 3,200 watts during Heat or Dry Cycle.
- Proudly made in the USA in a U.S. EPA registered facility.



Requires NEMA 14-30R  
 240V Receptacle  
 Within 5 ft of the upper  
 right rear corner

## EASE OF USE FEATURES

- ERGONOMIC** Integrated Mobil Cart System alleviate the need for bending and lifting.
- FAST** Cycles last only 38 minutes. No delay between cycles.
- POWER** No hardwiring, only requires plug-in electrical outlet.
- OPERATION** Simple operating panel.
- GUARANTEE** Includes a three-year warranty for parts and labor.

## ACCESSORIES

- RR 10** 10-bin Cart      **HC 3M 48** Helmet Cart      **4S UC** 4-shelf Utility Cart  
**PC 2M 22** Pad Cart      **GC** Garment Cart      **4S D UC** 4-shelf Deep Utility Cart

